


# KETTINGWIELEN - SIMPLEX

Voor rollenketting 06B-1

Vlgs. Din 8187

3/8" x 7/32"

Tanden aantal	Boring		Naaf afmeting		Steek cirkel	Kop cirkel	Gewicht Ca. kg	
	Z	D1 mm	max. mm	Dm mm	A mm	Dp mm		De mm
8	8	8	9	15	22	24,89	28,60	0,03
9	8	8	12	18	22	27,85	31,50	0,04
10	8	8	13	20	22	30,82	34,50	0,05
11	8	8	14	22	25	33,80	37,50	0,08
12	8	8	16	25	25	36,80	40,50	0,10
13	8	8	18	28	25	39,80	43,50	0,13
14	8	8	20	31	25	42,80	46,50	0,16
15	8	8	22	34	25	45,81	49,50	0,19
16	10	10	24	37	28	48,82	52,50	0,24
17	10	10	26	40	28	51,83	55,50	0,28
18	10	10	28	43	28	54,85	58,60	0,33
19	10	10	30	45	28	57,87	61,60	0,36
20	10	10	31	46	28	60,89	64,60	0,39
21	12	12	32	48	28	63,91	67,60	0,42
22	12	12	33	50	28	66,93	70,60	0,46
23	12	12	34	52	28	69,95	73,70	0,50
24	12	12	35	54	28	72,97	76,70	0,54
25	12	12	37	57	28	76,00	79,70	0,60
26	12	12	40	60	28	79,02	82,70	0,66
27	12	12	40	60	28	82,04	85,70	0,67
28	12	12	40	60	28	85,07	88,80	0,69
29	12	12	40	60	28	88,09	91,80	0,70
30	12	12	40	60	28	91,12	94,80	0,72
31	14	14	44	65	30	94,15	97,90	0,87
32	14	14	44	65	30	97,17	100,90	0,89
33	14	14	44	65	30	100,20	103,90	0,91
34	14	14	44	65	30	103,23	106,90	0,92
35	14	14	44	65	30	106,26	110,00	0,95
36	14	14	47	70	30	109,29	113,00	1,05
37	14	14	47	70	30	112,32	116,00	1,09
38	14	14	47	70	30	115,34	119,00	1,10
39	14	14	47	70	30	118,37	122,10	1,12
40	14	14	47	70	30	121,40	125,10	1,14
42	16	16	52	80	32	127,46	131,10	1,56
43	14	14	52	80	32	130,49	135,10	1,61
45	16	16	52	80	32	136,54	140,50	1,66
46	16	16	52	80	32	139,58	143,50	1,67

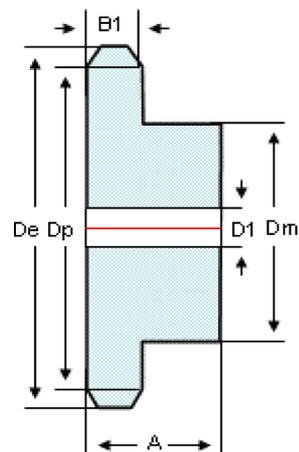

Ook afwijkende tandenaantallen op voorraad, specificaties op aanvraag.

Steek	P	=	9,525 mm
Binnenbreedte	E	=	5,720 mm
Roldiameter	D3	=	6,350 mm
Tandbreedte	B1	=	5,300 mm

materiaal: staal C45


# KETTINGWIELEN - SIMPLEX

Voor rollenketting 06B-1

Vlgs. Din 8187

3/8" x 7/32"

Tanden aantal	Boring		Naaf afmeting		Steek cirkel	Kop cirkel	Gewicht Ca. kg
	D1 mm	max. mm	Dm mm	A mm	Dp mm	De mm	
48	16	52	80	32	145,64	149,80	1,75
50	16	52	80	32	151,69	155,90	1,80
51	16	52	80	32	154,72	159,30	1,82
52	16	52	80	32	157,75	162,40	1,83
53	16	52	80	32	160,78	165,40	1,85
54	16	52	80	32	163,82	168,40	1,87
55	16	52	80	32	166,85	171,00	1,89
56	16	52	80	32	169,88	174,50	1,93
57	16	52	80	32	172,91	177,50	1,96
60	16	52	80	32	181,99	186,40	2,03
70	16	52	80	32	212,30	216,90	2,39
76	16	52	80	32	230,49	235,00	2,67
95	16	52	80	32	288,08	292,50	4,06
114	18	52	80	32	345,68	350,30	5,89

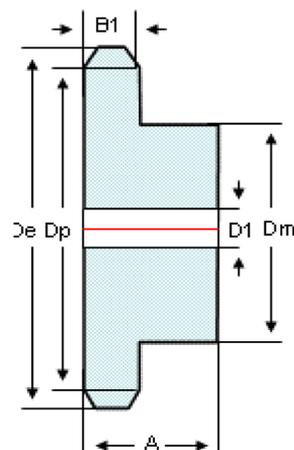

Ook afwijkende tandenaantallen op voorraad, specificaties op aanvraag.

Steek	P	=	9,525 mm
Binnenbreedte	E	=	5,720 mm
Roldiameter	D3	=	6,350 mm
Tandbreedte	B1	=	5,300 mm

materiaal: staal C45